

PROJECT:

TYPE:

LOCATION:

CAT:

**Description**

DMX RGB/RGBW touch wall control for RGB/RGBW light control; single zone operation, 10 preset levels, and 1-3 scene memory.

**Features**

- 3 programmable scene settings
- 4 color presets (Red, Green, Blue, White)
- Dynamic white with 3 blend modes
- Independently dim each channel
- 10 auto effect presets
- Touch sensitive interface
- Full-range dimming (1-100%)
- Carry reliable DMX 512 signals up to 400 feet
- Pair multiple receivers to a single control
- Requires DMX receiver for install (sold separately)

**Mounting**

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

**Applications**

Dimming, CCT, scene, and zone control for RGB/RGBW

**Warranty**


3 years



## Technical Information

Voltage	12-24V DC
Output	DMX 512 Signal
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

## Dimensions

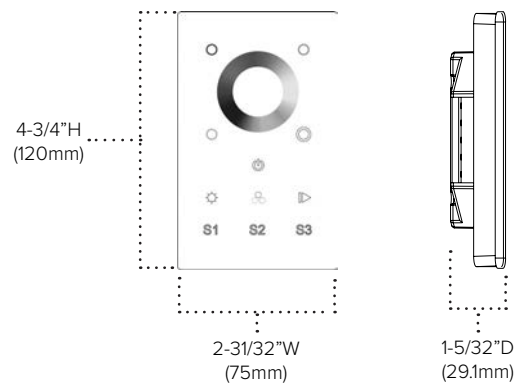

## Recommended Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-DMX-5A-4Z	DMX Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32"
REC-DMX-5A-4Z-PLUS	DMX Receiver with Standalone mode	Dry location	12-36V DC	4x5A	4x(96-288)W	RoHS	(178.9mm x 45.5mm x 18.6mm)

Controller can be powered from secondary side of 12-24V DC driver being used to power the receiver/tape light.  
See 'Control Options' on selected tape light for more information.

## Ordering Information

**DMX RGBW  
Touch Wall  
Control****DMX-1Z-3P includes:**

(1) DMX RGBW Touch Wall Control  
(requires DMX receiver, sold separately)

PROJECT:  TYPE:

LOCATION:  CAT:



### Description

DMX RGB/RGBW touch wall control for RGB/RGBW light control; 1-3 zone operation, and 10 preset levels

### Features

- 1-3 zone operation
- 4 color presets (Red, Green, Blue, White)
- Dynamic white with 3 blend modes
- Independently dim each channel
- 10 auto effect presets
- Touch sensitive interface
- Full-range dimming (1-100%)
- Carry reliable DMX 512 signals up to 400 feet
- Pair multiple receivers to a single control
- Requires DMX receiver for install (sold separately)

### Mounting

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

### Applications

Dimming, CCT, scene, and zone control for RGB/RGBW

### Warranty


3 years

## Technical Information



Voltage	12-24V DC
Output	DMX 512 Signal
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

Dimensions

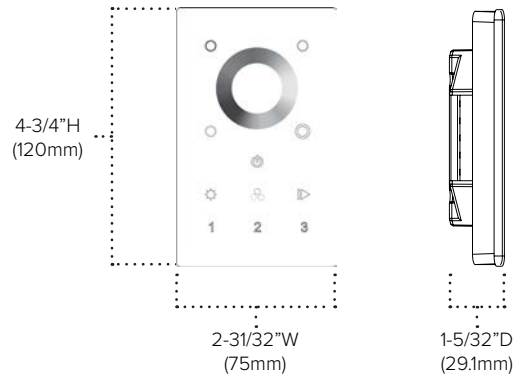


## Recommended Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-DMX-5A-4Z	DMX 512 Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32"
REC-DMX-5A-4Z-PLUS	DMX 512 Receiver with Standalone mode	Dry location	12-36V DC	4x5A	4x(96-288)W	RoHS	(178.9mm x 45.5mm x 18.6mm)

Controller can be powered from secondary side of 12-24V DC driver being used to power the receiver/tape light. See 'Control Options' on selected tape light for more information.

## Ordering Information

**DMX RGBW  
Touch Wall  
Control**



### DMX-3Z includes:

- (1) DMX RGBW Touch Wall Control (requires DMX receiver, sold separately)