

PROJECT:  TYPE:

LOCATION:  CAT:

### Description

Flexible LED linear lighting that mimics the look of neon in a brighter, longer lasting format that consumes less power

### Features

- PU construction provides excellent UV, salt water, chlorine, high temperature, and impact resistance
- Weatherproof IP67 outdoor rating
- Lateral flexibility (relative to light source)
- Quick-ship skus or special order options

### Mounting


Aluminum channel or mounting clips

### Applications

Outlining building facades and roof-lines, columns and pillars, coves and eaves

### Warranty

5 Years

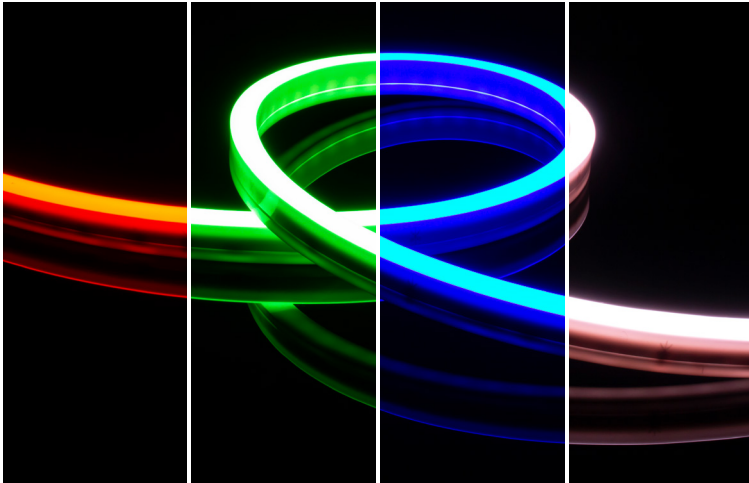


## Technical Information


Input Voltage	24V DC Constant Voltage
Max Current	0.59A per meter / 0.18A per foot
Max Power	14.2W per meter / 4.33W per foot
Color	RGBW
Lumens	131Lm/ft
Cut Increments	100mm (3.94")
Max Run	10 meters (32.8 feet) interconnected
Dimming	Requires RGB Control
Ambient Temp	-30°C (-22°F) to 80°C (176°F)**
Rating	cETLus Listed; Indoor/Outdoor; IP67
Rated Life	50,000 Hours

\*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers. \*\*Do not install during inclement weather or extreme temperature conditions (i.e. -25°C (-13°F) and below)

### Side Profile

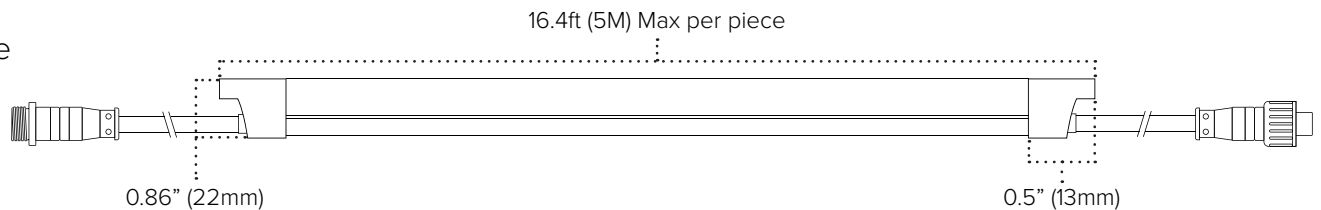


### Top Profile

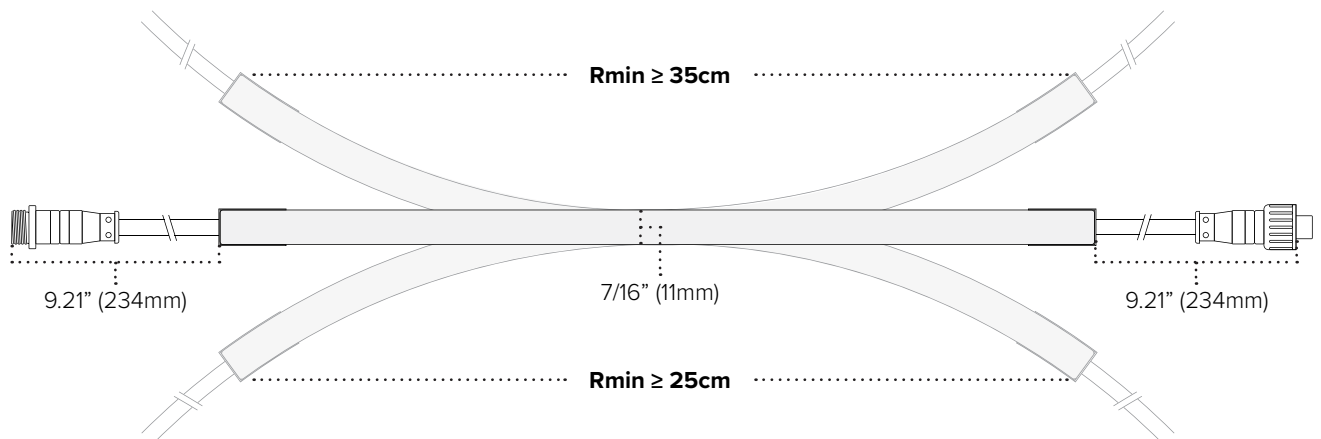

Special Order Information

Please allow 12-16 weeks for special order items

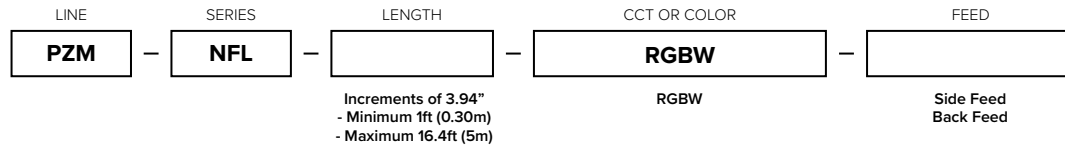

Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	<b>30W, 60W, 96W, 150W</b>
ADPT-DRJ Series	<b>30W, 60W, 96W</b>