

PROJECT:	TYPE:
LOCATION:	CAT:

### Description

Flexible LED linear lighting that mimics the look of neon in a brighter, longer lasting format that consumes less power

### Features

- Omni-directional light emits from 3 sides
- PU construction provides excellent UV, salt water, chlorine, high temperature, and impact resistance
- Weatherproof IP67 outdoor rating
- Quick-ship skus or special order options

### Mounting


Aluminum channel or mounting clips

### Applications

Outlining building facades and roof-lines, columns and pillars, coves and eaves

### Warranty


5 Years

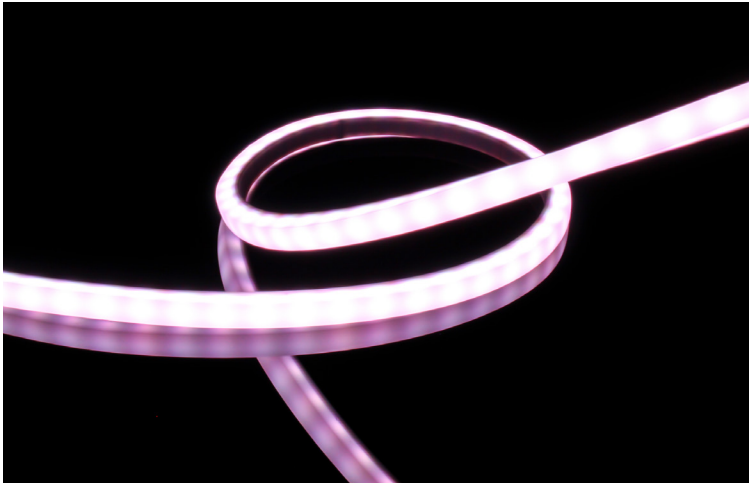


## Technical Information

Input Voltage	24V DC Constant Voltage				
Max Current	0.416A per meter / 0.127A per foot				
Max Power	10W per meter / 3.05W per foot				
Color	Ultra Warm White	Warm White	White	Bright White	Cool White
CCT/nm	2700K	3000K	4000K	5000K	6000K
Lumens	207Lm/ft	210Lm/ft	213Lm/ft	216Lm/ft	219Lm/ft
CRI	80+				
Cut Increments	50mm (1.96")				
Max Run	10 meters (32.8 feet) interconnected				
Dimming	10-100% with most TRIAC or ELV dimmers*; 0-10V Dimming capable				
Ambient Temp	-30°C (-22°F) to 80°C (176°F)**				
Rating	cETLus Listed; Indoor/Outdoor; IP67				
Rated Life	50,000 Hours				

\*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers. \*\*Do not install during inclement weather or extreme temperature conditions (i.e. -25°C (-13°F) and below)

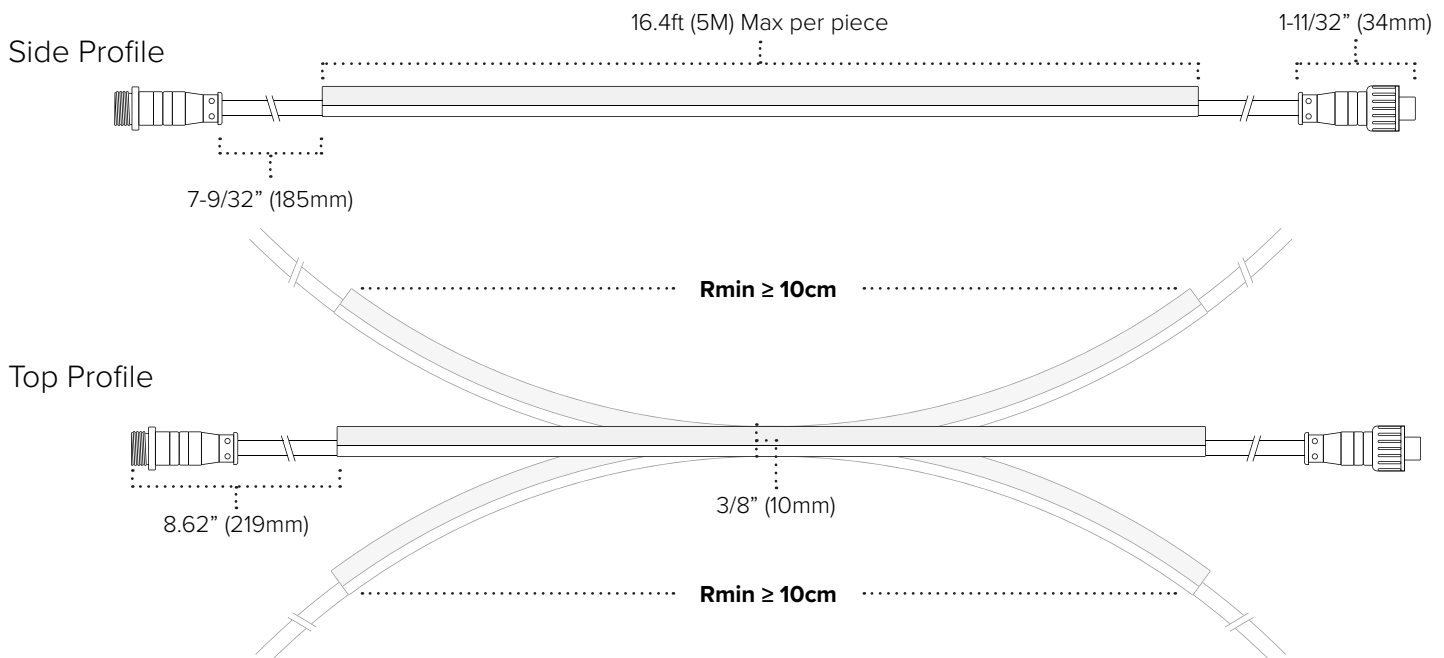

Photometrics For additional photometric information and IES files, please visit [PrizmLighting.com](http://PrizmLighting.com)

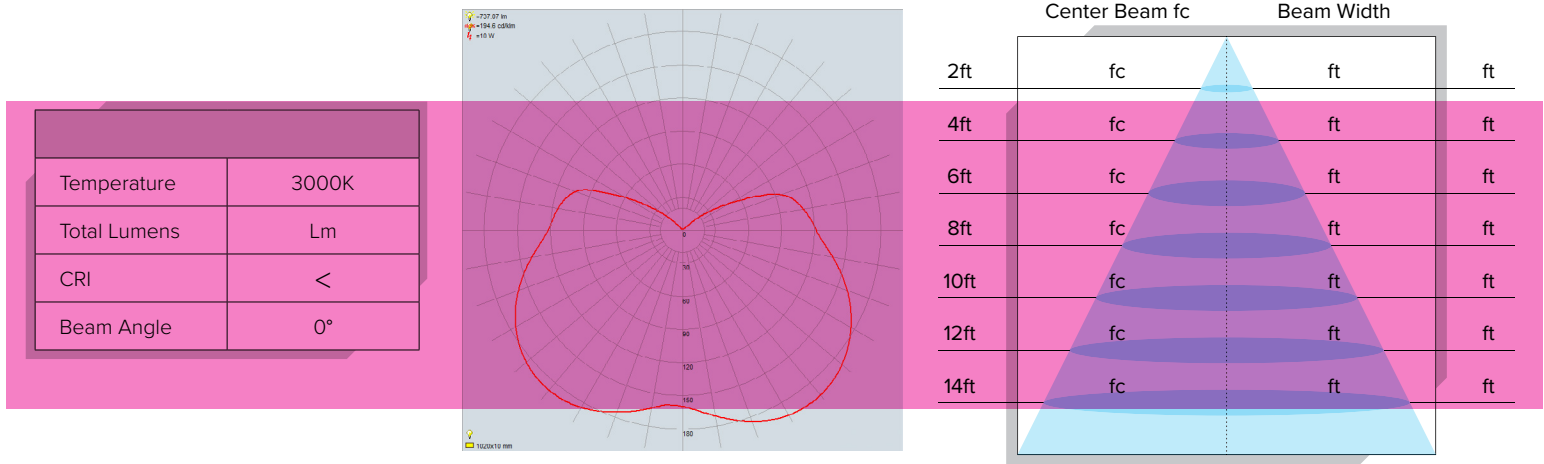


## Quick-Ship Order Information

FIXTURE	ITEM NUMBER	FIXTURE	ITEM NUMBER
4FT OMNILUX WARM WHITE 3000K	<b>PZM-NFM-4-WW</b>	8FT OMNILUX WARM WHITE 3000K	<b>PZM-NFM-8-WW</b>
4FT OMNILUX BRIGHT WHITE 5000K	<b>PZM-NFM-4-WH</b>	8FT OMNILUX BRIGHT WHITE 5000K	<b>PZM-NFM-8-WH</b>
ACCESSORY		ITEM NUMBER	
4FT ALUMINUM CHANNEL FOR OMNILUX SERIES		<b>PZM-NFM-CHAN-4</b>	
1FT 2PIN JUMPER CABLE FOR NEOFLUX SINGLE COLOR		<b>PZM-NF-2JUMP1</b>	
10FT 2PIN JUMPER CABLE FOR NEOFLUX SINGLE COLOR		<b>PZM-NF-2JUMP10</b>	
BAG OF 2 MOUNTING BRACKET FOR OMNILUX SERIES		<b>PZM-NFM-CLIPS</b>	
BAG OF 10 END CAPS FOR OMNILUX SERIES		<b>PZ-NFM-END</b>	

## Special Order Information

Please allow 12-16 weeks for special order items

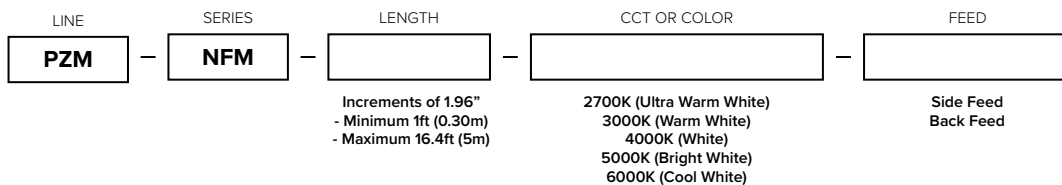

## Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	<b>30W, 60W, 96W, 150W</b>
ADPT-DRJ Series	<b>30W, 60W, 96W</b>