

|           |       |
|-----------|-------|
| PROJECT:  | TYPE: |
| LOCATION: | CAT:  |

### Description

Flexible LED linear lighting that mimics the look of neon in a brighter, longer lasting format that consumes less power

### Features

- PU construction provides excellent UV, salt water, chlorine, high temperature, and impact resistance
- Weatherproof IP67 outdoor rating
- Vertical flexibility (relative to light source)
- Quick-ship skus or special order options

### Mounting


Aluminum channel or mounting clips

### Applications

Outlining building facades and roof-lines, columns and pillars, coves and eaves

### Warranty

5 Years

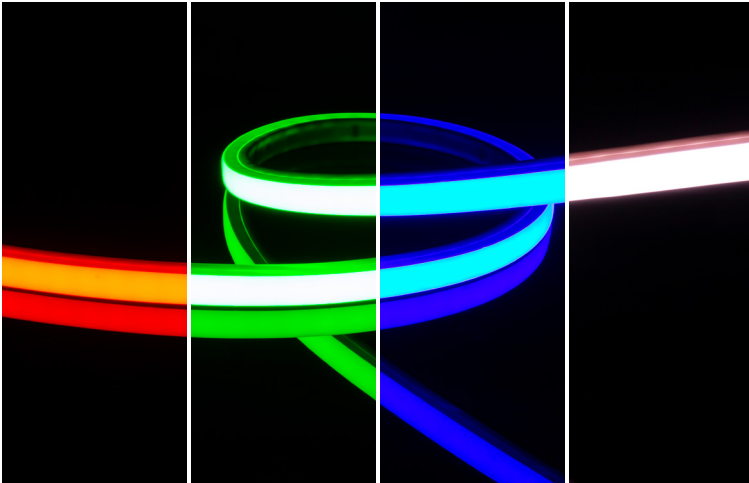


## Technical Information


|                |                                      |
|----------------|--------------------------------------|
| Input Voltage  | 24V DC Constant Voltage              |
| Max Current    | 0.59A per meter / 0.18A per foot     |
| Max Power      | 14.2W per meter / 4.33W per foot     |
| Color          | RGBW                                 |
| Lumens         | 240Lm/ft                             |
| Cut Increments | 100mm (3.94")                        |
| Max Run        | 10 meters (32.8 feet) interconnected |
| Dimming        | Requires RGB Control                 |
| Ambient Temp   | -30°C (-22°F) to 80°C (176°F)**      |
| Rating         | cETLus Listed; Indoor/Outdoor; IP67  |
| Rated Life     | 50,000 Hours                         |

\*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers. \*\*Do not install during inclement weather or extreme temperature conditions (i.e. -25°C (-13°F) and below)

### Side Profile

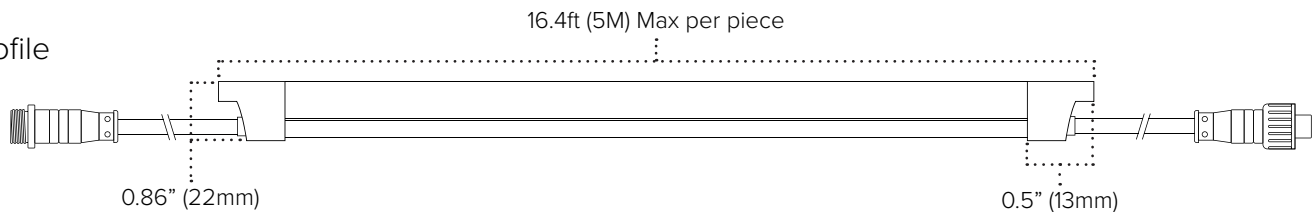

### Top Profile

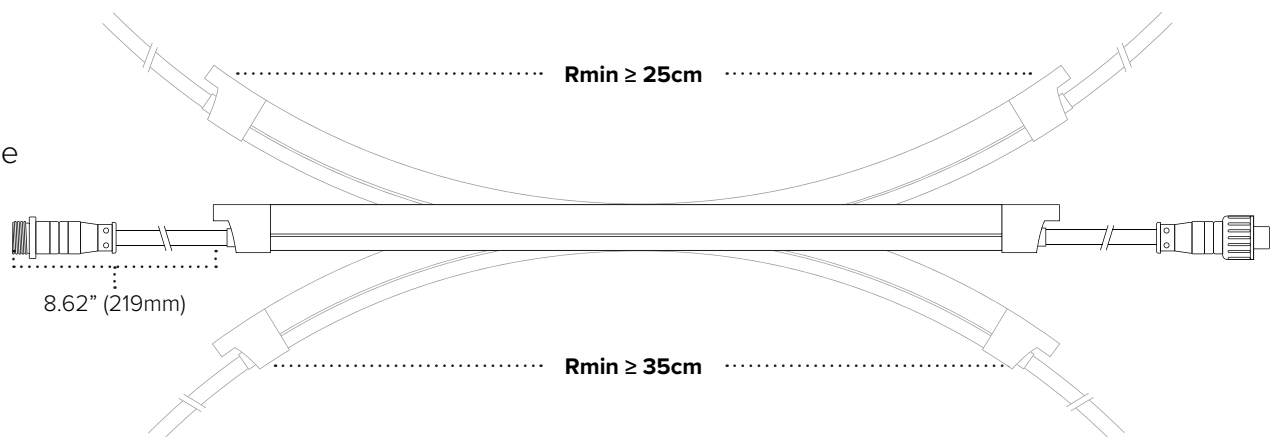


## Quick-Ship Order Information

| FIXTURE  | ITEM NUMBER    |
|--|----------------|
| 4FT NEOFLUX V-SERIES RGB                       | PZM-NFV-4-RGB  |
| 8FT NEOFLUX V-SERIES RGB                       | PZM-NFV-8-RGB  |
| ACCESSORY                                      | ITEM NUMBER    |
| 4FT ALUMINUM CHANNEL FOR NEOFLUX V-SERIES      | PZM-NFV-CHAN-4 |
| 1FT 4PIN JUMPER CABLE FOR NEOFLUX RGB          | PZM-NF-4JUMP1  |
| 10FT 4PIN JUMPER CABLE FOR NEOFLUX RGB         | PZM-NF-4JUMP10 |
| BAG OF 2 MOUNTING BRACKET FOR NEOFLUX V-SERIES | PZM-NFV-CLIPS  |
| BAG OF 10 END CAPS FOR NEOFLUX V-SERIES        | PZ-NFV-END     |

## Special Order Information

Please allow 12-16 weeks for special order items

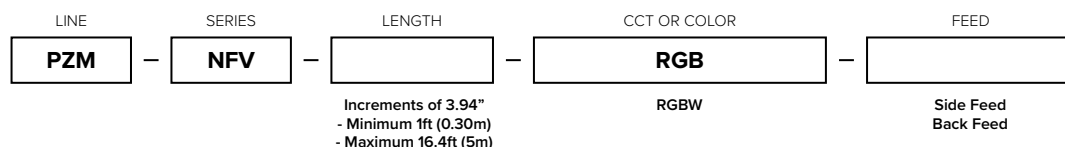

## Recommended Power Supplies

| SERIES          | RATED POWER AVAILABLE |
|-----------------|-----------------------|
| LED-DR Series   | 30W, 60W, 96W, 150W   |
| ADPT-DRJ Series | 30W, 60W, 96W         |