

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

LOCATION: \_\_\_\_\_

CAT: \_\_\_\_\_

### Description

Bendable tape light built to take tight turns and bends in the same run.

### Features


- Bendable tape light design
- Unjacketed (IP54) rating
- 3000K color temperature
- Cuttable every 3.94"

### Mounting

Surface mount via attached 3M adhesive tape

### Applications

Task or accent lighting, edge lighting, cabinetry, shelving, coves, staircases, toe kicks, railings, display cases

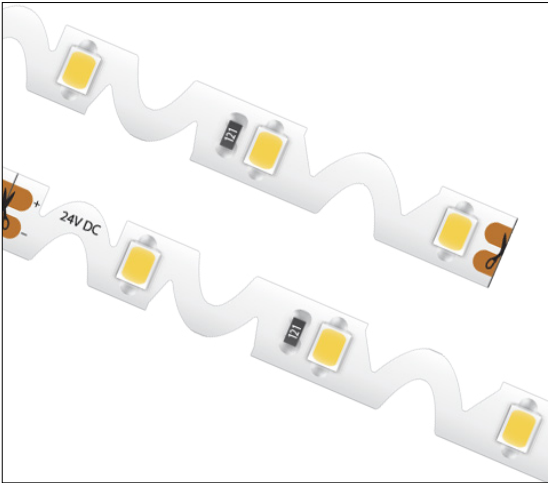


## Technical Information




IP Rating	IP54		
Voltage	24V DC		
CCT	2700K	3000K	4000K
CRI	94+		
Wattage	1.46W/ft		
Lumens	91Lm/ft		
Max Run	16.4 feet (5m)		
Cutting	every 3.94"		
Dimming	controllers or most low-voltage electronic dimmers / ELV Drivers		
LED	LEDs spaced every 0.66" (16.67mm)		
Beam	120°		
Operating Temp	5°C (41°F) to 70°C (158°F)		
Ambient Temp	-20°C (-4°F) to 40°C (104°F)		
Rating	cULus Listed, dry location		
Rated Life	50,000 Hours		

### Dimensions: TLB IP54 Unjacketed

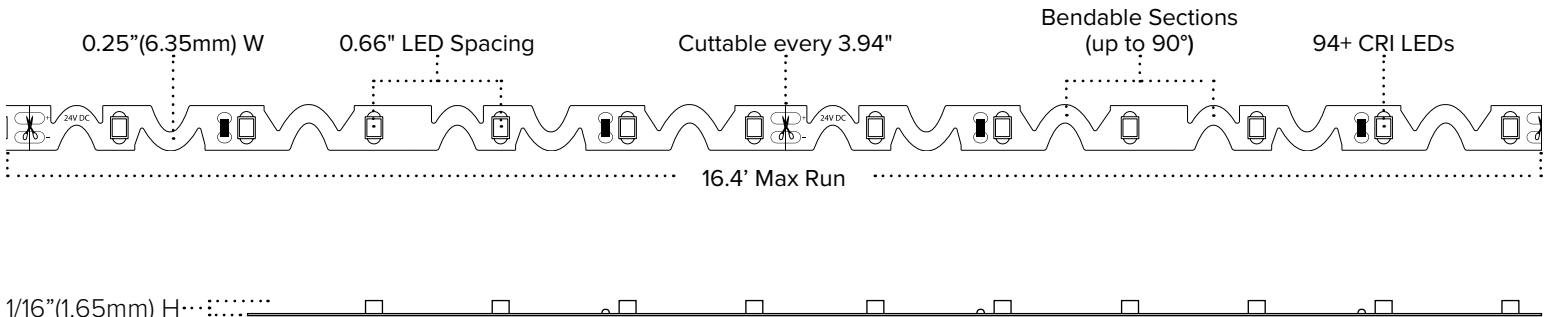

## Ordering Information

**24V 16.4ft Reels**  
**TLB Series**

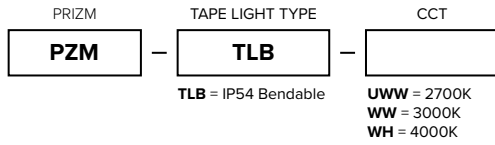

**TLB (IP54) 16.4ft Reels include:**  
Attached 3ft lead wire  
Attached 3ft tail wire

## Recommended Power Supplies

SERIES	RATED POWER AVAILABLE
LED-DR Series	<b>30W, 60W, 96W, 150W</b>
ELV Series	<b>30W, 45W, 60W, 80W</b>
ADPT-DRJ Series	<b>30W, 60W, 96W</b>

## NOTES

---



---



---



---



---